


Ege Bölgesi: Atıfbey Mah. 67. Sk No: 47 Kat: 5 D: 501 MİA PLAZA Gaziemir / İzmir / TÜRKİYE Tel: 0 232 472 27 28 Faks: 0 212 671 60 51 ege@hastek.com.tr







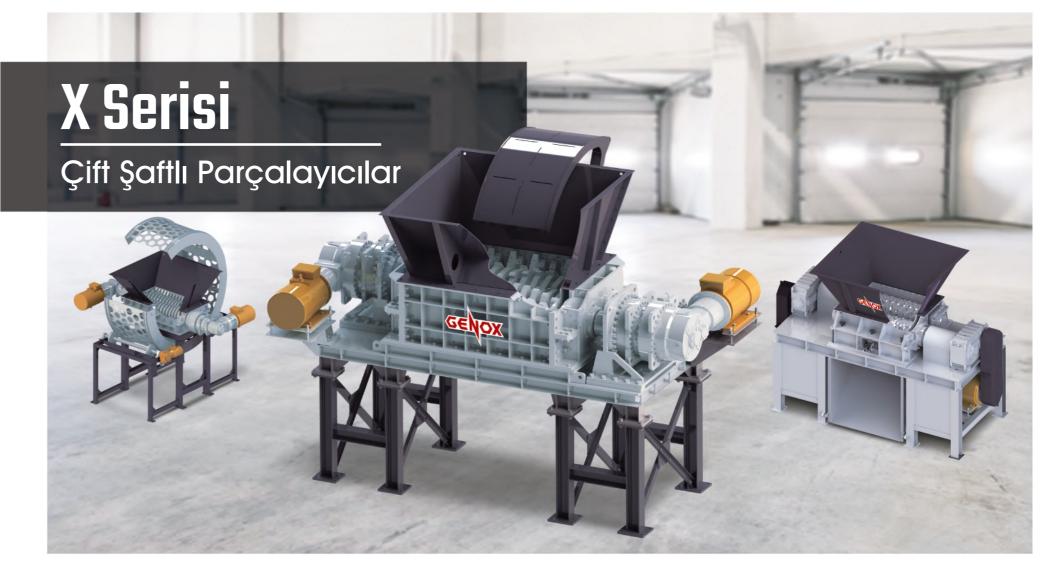












Twin Shaft Shredder

X Series

X Series Twin Shaft Shredders are extremely high torque, high throughput, rotating shear type size reduction machines often used for pre-shredding of large volume or high strength materials which may contain contamination. The unique modular split chamber design, provides excellent access to key components therefore reducing maintenance downtime and service costs.





Rotary Screen

To effectively control the output product size, a circular screen mounted around the cutting chamber is the ideal solution. The rotary screen runs at low speed, the oversized fractions are recirculated back to the cutting chamber for further shredding, whilst the sized fraction falls through the screen to the next process.



Segmented Blades

The segmented blade design can greatly reduce the blade changing time and cost. The blade comprises of the blade holder, and two types of blade segments, with and without hooks. Worn blade segments can quickly and easily be removed and replaced by simply removing the securing screws. As the blade holders need not be removed from the shafts, simplified maintenance and reduced downtime results. Various blade configurations, hook profiles and widths



Blade Configuration & Width

Blade profile and width can be specified to suit the type of materials being processed. The width of the output material fractions can be controlled by the thickness of blades. Careful selection of the blade configuration and width is recommended to ensure optimum shredder performance.



Splined Drive Shafts

Hexagonal shafts are still considered by many to be an effective design, and were it not for the wear and maintenance problems caused by loose blades rocking on the shafts, particularly in demanding applications with frequent reversals, they would still be preferred by many users. GENOX have resolved theses issues caused by loose blades with our splined shaft design, which securely locks blades and spacers on the drive shafts, eliminating blade rock and prolonging shaft life.



Blade Hook Design

Blade hook designs can be selected according to the nature of the materials being processed. The length of the output material fractions can be controlled by the number of hooks. Experienced selection of the blade hook profile and quantity is of prime-importance.



Hydraulic Force Feeder

A hydraulic force feeder is available to actively press the input material down into the cutting zone between the two shearing shafts. This holding action prevents material from riding over the blade hooks, thus greatly improving the cutting efficiency and throughput of the machine. The thoughtful, modular design of the feeder and associated hydraulic power unit provides unhindered access during maintenance, simplifying routine hydraulic oil changes and other maintenance tasks.












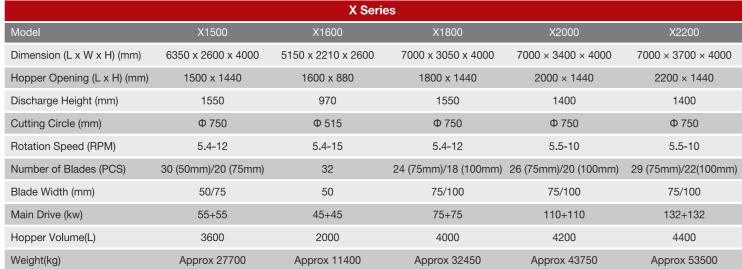

















DISCS

